

2UCD074000E0091_C

PCS100 AVC-40

Active Voltage Conditioner (IEC)

Technical Catalogue

150 kVA – 300 kVA





ABOUT THIS DOCUMENT

ABB Power Conditioning

Leading the industry in innovation and technology, ABB provides power conditioning for many of the world's foremost organizations, ensuring the continuous operation of small, medium to large businesses are protected on a global scale.

ABB's Power Conditioning portfolio is a unique line up of low and medium voltage power conversion technology that is part of the product group, Power Protection.

The portfolio consists of static frequency converters, UPSs, voltage and power conditioners that demonstrate highly reliable and cost-effective performance. With this product portfolio, ABB offer efficient power conditioning solutions that are specifically designed to solve power quality problems and stabilize networks.

Covering applications from data centers through to complete industrial plant protection, micro grid systems and shore-to-ship supply, ABB have the power conversion technology for every need. Starting from a few kVA to many MVA and a wide range of supply voltages.

It's business as usual with power conditioning technologies in place

Power Conditioning Product Portfolio

Product Line	Typical Problems	Product
Industrial UPS	Utility deep sag and surge correction	PCS100 UPS-I Industrial UPS
	Utility outage protection	HiPerGuard MV UPS
Voltage conditioning	Utility sag and surge correction	PCS100 AVC-40 Active Voltage Conditioner for sag correction
	Load voltage regulation	PCS100 AVC-20 Active Voltage Conditioner for voltage regulation
Frequency Conversion	50/60 Hz conversion Frequency fluctuation	SureWave SFC



Document Information

Copyright notice

The information in this manual is subject to change without notice. This manual and parts thereof must not be reproduced or copied, or disclosed to third parties, nor used for any unauthorized purpose without written permission from ABB Ltd. The hardware and software described in this manual are provided under a license and may be used, copied, or disclosed only in accordance with the terms of such license.

Document identification

Ownership: ABB Ltd., Power Conditioning Products

Document number: 2UCD74000E0091

Ownership: ABB Ltd., Power Conditioning Products

Issue date: 5/17/2024

Revision: Rev C

Contact information

Address: ABB Ltd. 111 Main North Road, Napier, New Zealand.

Website: <https://new.abb.com/ups>

Contents


About This Document	2
ABB Power Conditioning.....	2
Power Conditioning Product Portfolio	2
Document Information.....	3
Voltage Sags – The Problem	6
PCS100 AVC-40 Active Voltage Conditioner	7
How it works.....	7
PCS100 AVC-40 Benefits	8
Reduce the cost of sag events.....	8
Improve plant operation	9
Faster return on investment	9
Reduce damage to equipment.....	9
Industries and Applications	9
Features	11
No energy storage.....	11
Very high efficiency	11
Continuous online regulation.....	11
Industrial design	11
Small footprint	11
Regenerative load support	11
Internal bypass.....	11
Connectivity.....	11
Modular construction	11
Sophisticated control software.....	11
Functional Description	12
PCS100 AVC-40 Correction Capabilities.....	12
PCS100 AVC-40 Performance Curve	12
PCS100 AVC-40 Operation Details.....	13
SEMI F47 Performance.....	16
Technical Specification	18
How to Select a PCS100 AVC-40	20
Type Code.....	20
Type Code Parameters:	20
PCS100 AVC Sizing Tool	20
PCS100 AVC-40 Model Range	21
Layout Plans and Dimensions	22
Layout Plans.....	22
Clearance	23
Weights.....	23
Options	24
Roof Kit (RK).....	24
Side Car (SC)	24
Termination Enclosure (TE)	25
Redundant Power Supply Unit (PS).....	25
User Interface	26
Graphic Display Module.....	26
Remote Monitoring	26
Remote Web Pages.....	27
Modbus TCP	27
E-mail.....	27

User Connections	28
Power Connections	28
Control Connections	28
Installation Requirements	30
Input Circuit Protection.....	30
Maintenance Bypass	30
Floor Requirements.....	30
Location	30
Power System	31
Electromagnetic Compatibility (EMC)	31
Harmonics	31
Downstream Capacitor Banks	31
Service and Technical Support	32
Comprehensive global services portfolio.....	32
Custom tailored service contracts.....	32
Life cycle management.....	32
Training.....	32
Engineering and technical support.....	32
Additional Documents	33

VOLTAGE SAGS – THE PROBLEM

Modern industries are becoming more automated and the sensitivity of processes to power quality events is increasing. Although utilities endeavor to supply reliable, high-quality power, voltage sags and surges will continue to be a fact of life, even with modern power networks. Even a short event of less than one cycle can cause processes to unexpectedly stop, potentially resulting in product damage, wastage, and production shortages.

A voltage sag is not a complete interruption of power; it is a temporary drop below 90 percent of the nominal voltage level. Most voltage sags do not go below 50 percent of the nominal voltage, and they normally last from 2 to 10 cycles - or from 32 to 200 milliseconds.

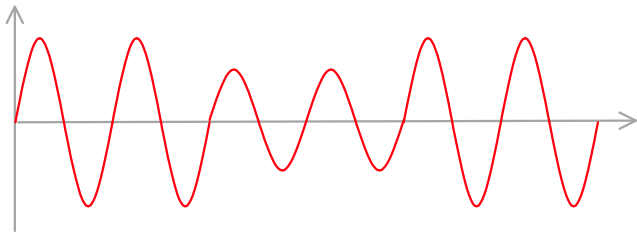

There are two sources of voltage sags: external, on the utility's transmission and distribution lines, and internal within the customer's facility.

Utilities continuously strive to provide the most reliable and consistent electric power possible. In the course of normal utility operations, however, many things can cause voltage sags.

Weather is the most common cause of external sags and momentary interruptions all around the world. Thunderstorms and lightning strikes on power lines create line to ground faults causing voltage sags in a wide area.



High winds can blow tree branches into power lines, connecting the line with the ground and shorting between phases. A series of sags will occur as the branches repeatedly touch the power lines.

Snow and ice buildup on power lines can cause flash overs on the insulators.



Other external causes are traffic accidents, construction works and animals impacting the power lines.

Internal causes of voltage sags can include starting major loads and grounding or wiring problems.

Whether or not a voltage sag causes a problem will depend on the magnitude and duration of the sag and on the sensitivity of your equipment. Many types of electronic equipment are sensitive to voltage sags, including variable speed drive controls, motor starter contactors, robotics, programmable logic controllers, controller power supplies, and control relays. Much of this equipment is used in applications that are critical to an overall process, which can lead to very expensive downtime when voltage sags occur.

PCS100 AVC-40 ACTIVE VOLTAGE CONDITIONER

The ABB PCS100 AVC-40 is an inverter-based system that protects sensitive industrial and commercial loads from voltage disturbances. Providing fast, accurate voltage sag and surge correction as well as continuous voltage regulation

and load voltage compensation. The PCS100 AVC-40 has been optimally designed to provide equipment immunity from power quality events on the supply network.




How it works

The PCS100 AVC-40 consists of two converters that are not on the current path between the load and the utility. Instead, the corrective voltage injection is achieved by means of a transformer winding between the utility and the sensitive load. This configuration results in a very efficient and effective method to provide voltage correction with reduced risk of negative impacts on the load.

The PCS100 AVC-40 requires no batteries as it draws the additional energy required during sag to make up the correction voltage from the utility supply. With no ongoing maintenance costs typically associated with batteries the cost of ownership for PCS100 AVC-40 systems is very small.

Furthermore, the PCS100 AVC-40 contains a redundant internal bypass system that, in the event of overload or internal fault condition, ensures that the load is continued to be supplied from the utility.

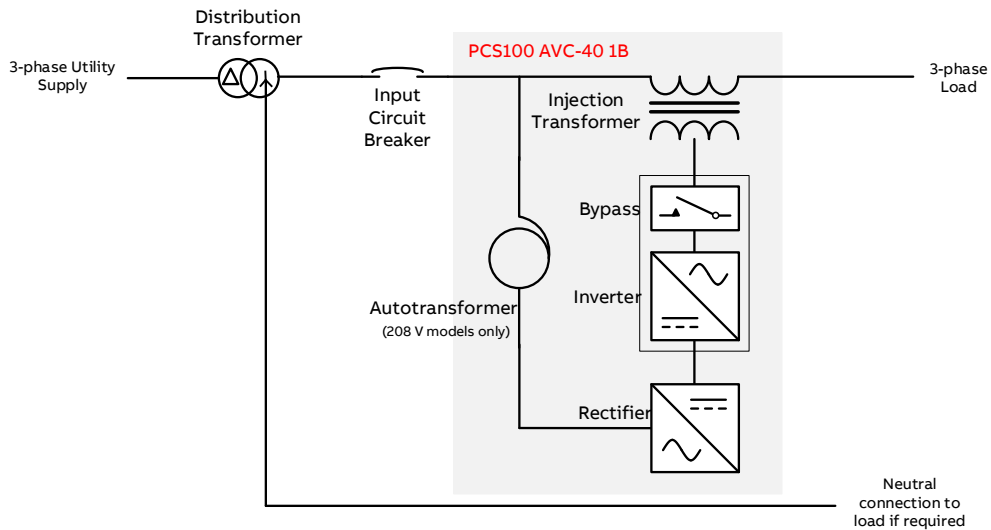

PCS100 AVC-40 BENEFITS



Reduce the cost of sag events

The PCS100 AVC-40 closes the electrical compatibility gap between the supply and plant by protecting the load from utility induced voltage sag events. The PCS100 AVC-40 minimizes the undue stress to the expensive equipment, thus increasing the equipment lifetime.

With high power capacity, the PCS100 AVC-40 is a perfect solution for industrial loads using significant power as well as large commercial buildings where continuity of service is paramount. The PCS100 AVC-40 is designed to target voltage sag events while also providing protection against swells. Sag events is the major cause of lost production.

Improve plant operation

The PCS100 AVC-40 regulates the voltage, removing long term undervoltage, overvoltage and voltage

imbalance to reduce waste and damage to the expensive equipment. It also removes voltage fluctuations, which can cause process variation, improving the quality of operation of the plant or the facility.

Faster return on investment

With industry leading efficiency exceeding 98 percent the PCS100 AVC-40 requires minimal costs for electricity and cooling. With no energy storage the ongoing maintenance cost is minimized, resulting low total cost of ownership.

Reduce damage to equipment

Protect expensive equipment by regulating the voltage to remove long term undervoltage, overvoltage and voltage imbalance

INDUSTRIES AND APPLICATIONS

Industrial automation has reached very high levels of sophistication. Industrial plants and commercial equipment now use advanced technology, and this technology relies on a robust and continuous power supply. However, the utility grid is susceptible to unpredictable events, such as lightning strikes and faults, resulting in voltage sags.

In the modern industrial world voltage sags cause disturbances in process and product defects. This results in wasted material, long restart times, extensive repair or maintenance activities, revenue

losses or contractual penalties. The costs of such events can quickly amount to hundreds of thousands of dollars.

Nowadays, almost all continuous production lines and process industries or sensitive medical equipment must perform faultlessly on a continuous basis. Ensuring that equipment receives a stable, clean, continuous flow of power, even during major grid disturbances, is where the PCS100 AVC-40 comes in.

PCS100 AVC-40 provides power protection of commercial and industrial loads

Electronics industry

Sensitive machinery
Clean room control



Food and beverage

High speed bottling
Packaging lines
Dairy processing



Automotive

Welding process
Coating process
Painting process



Continuous process

Fiber production lines
Film production lines
Extrusion process

Pharmaceutical

Batch process
Climate control

Medical

Sensitive medical imaging equipment



FEATURES



No energy storage

Increased system reliability with minimized maintenance

Very high efficiency

Typically >98% even on partial loading

Continuous online regulation

Continuous regulation within $\pm 10\%$ with response less than 250 μs and correction in less than $\frac{1}{2}$ cycle

Industrial design

Rugged overload capability, industrial grade fault capacity, designed for industrial loads

Small footprint

Industry leading power density

Regenerative load support

Bidirectional power module design allows connection of regenerative loads such as lifts and cranes

Internal bypass

Redundant internal bypass design guaranteeing continuity of load supply in case of PCS100 AVC-40 fault

Connectivity

Ethernet
Modbus TCP
Integrated web server
E-mail notifications

Modular construction

Proven PCS100 power converter platform, with more than 1800 MVA installed base, enabling fast and easy maintenance

Sophisticated control software

Based on 20 years voltage conditioning industry experience

FUNCTIONAL DESCRIPTION


PCS100 AVC-40 Correction Capabilities

The PCS100 AVC-40 responds to voltage sags or swells within several milliseconds and can inject up to 40 percent voltage correction. If a facility was faced with a voltage sag to 60 percent of nominal voltage the PCS100 AVC-40 would boost the voltage back to 100 percent. Voltage sags with 50 per-cent of nominal voltage are corrected back to 90 percent. No process interruption, no equipment would trip, just business as usual.

Performance is even better for single phase sags (the most common type), voltage sags down to 40 percent of the nominal voltage are fully corrected. In case of deeper voltage sags, The PCS100 AVC-40 provides a partial correction, which will often prevent loads tripping. In addition, it can continuously correct voltage fluctuations of ± 10 percent of nominal, and remove imbalances.


Utility Supply Problem	Input	Output	Correction Time
Three-phase utility sags correction from	60% remaining supply voltage	100%	30 seconds
	50% remaining supply voltage	90%	10 seconds
	40% remaining supply voltage	70%	600 milliseconds
Single-phase utility sags correction from	40% remaining voltage	100%	30 seconds
	0% remaining voltage	57%	600 milliseconds
Single-phase utility swells correction from 115% voltage		100%	Continuous
Three-phase utility undervoltages to 90% of the nominal supply voltage		100%	Continuous
Three-phase utility overvoltages up to 110% of the nominal supply voltage		100%	Continuous
Correction of phase angle errors created by faults in the supply system		Yes	
Correction of voltage imbalance from utility supply		Yes	
Attenuation of flicker voltages in the utility supply		Yes	

PCS100 AVC-40 Performance Curve

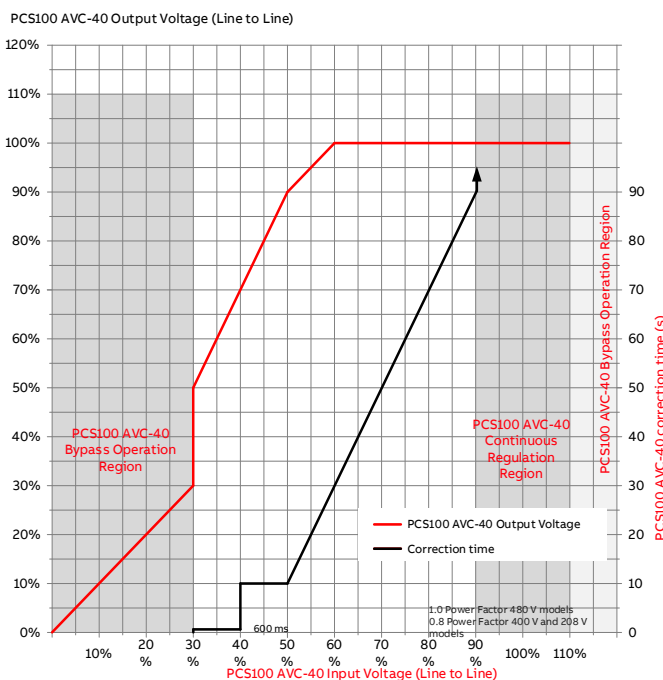

Three Phase Balanced Events

The performance curves on the left apply to three phase balanced supply voltage disturbances upstream of the PCS100 AVC-40.

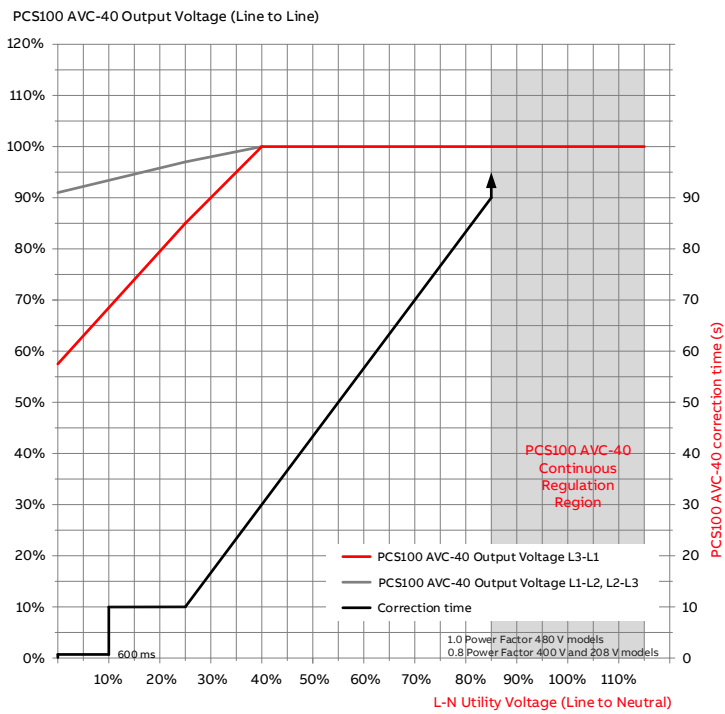

Single-Line-To-Ground Events

The performance curves on the left apply to single-line-to-ground supply voltage disturbances upstream of the Dyn11 distribution transformer upstream of PCS100 AVC-40.




PCS100 AVC-40 Operation Details

The following diagrams show the PCS100 AVC-40 operation when a utility disturbance occurs, and operation of the internal bypass.

Utility Disturbance Occurs

When the utility voltage deviates from nominal or the set point due to a power quality event, the inverter will inject a correcting voltage via the Injection Transformer. The correcting voltage level is based on the disturbance level and the energy needed for correction is sourced from the utility via the PCS100 AVC-40 rectifier.

Diagrams on the right show cases with utility voltage below and above nominal level.

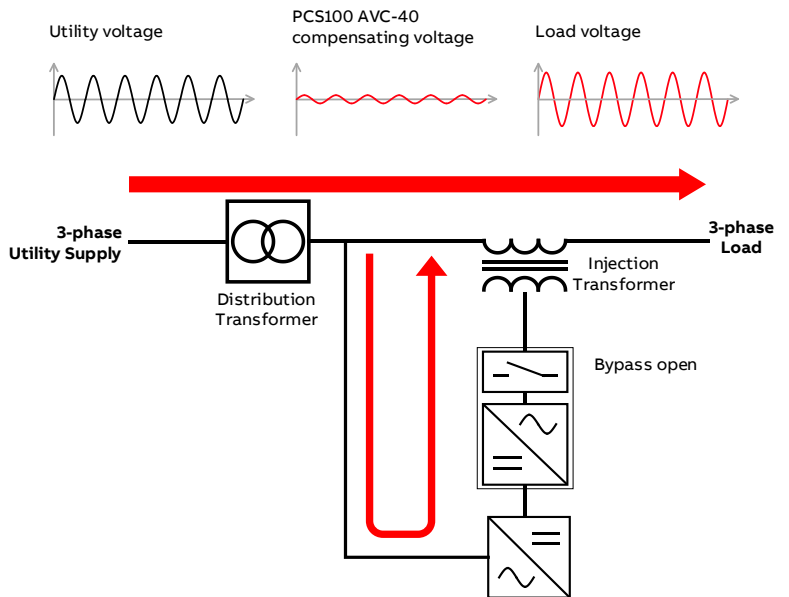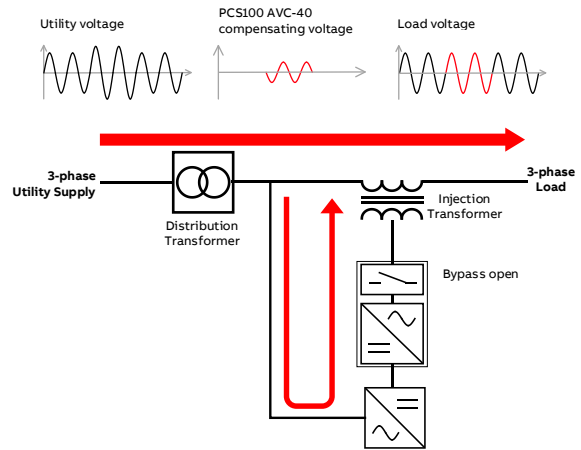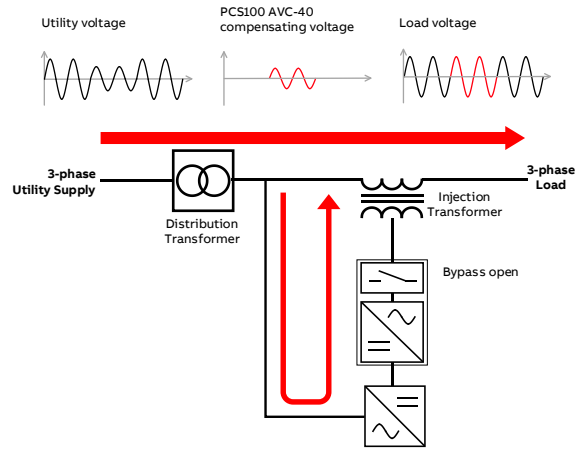


Utility Voltage within Continuous Regulation Range

When the utility voltage is within continuous regulation region ($< \pm 10\%$), the PCS100 AVC-40 can indefinitely add compensating voltage.

Internal Bypass Operation

In the case of an overload or internal fault condition the internal bypass circuit will shunt the inverter side of the Injection


Transformer, bypassing the inverter and effectively providing a direct connection from the utility supply to

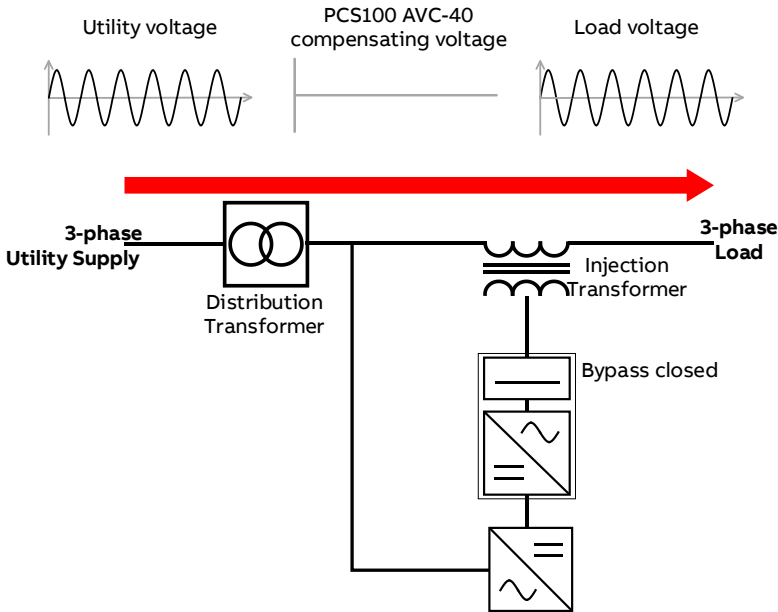

SEMI F47 Performance

Figure below illustrates the typical voltage sag distribution where it can be observed that most voltage sags are shallow and last for less than 100 ms. However, looking at what’s happening with the utility voltage is only half of the story. Tools are designed to be able to withstand voltage fluctuations. Certain types of tools can tolerate more than others. The rule of thumb is that a higher degree of automation leads to a higher susceptibility to voltage sags.

Most voltage sags are shallow and lasts less than 100 ms

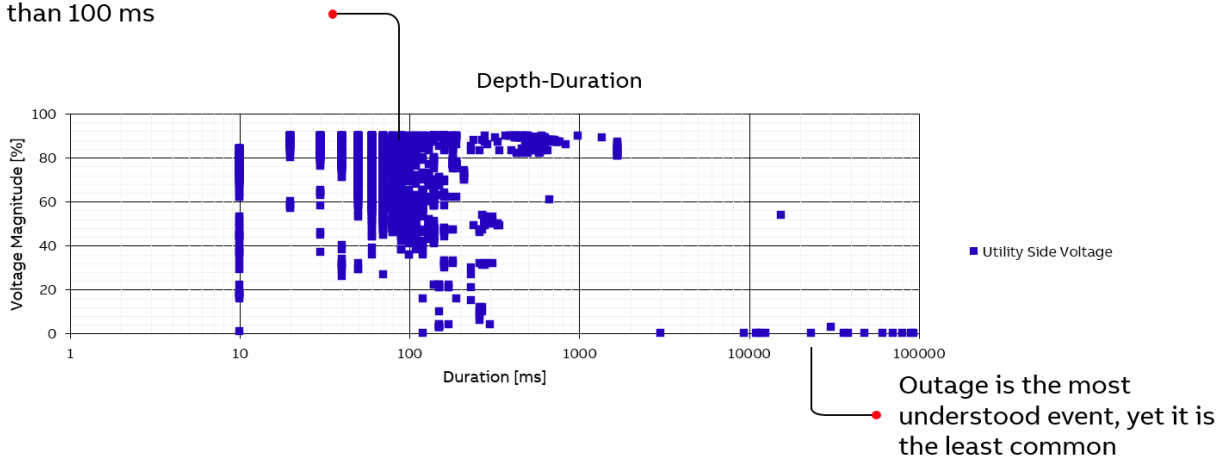


There are several sag immunity standards in use. Sag Immunity standards define the depth and duration of voltage sags that a tool should be able to withstand. SEMI F47 is a well-known standard used in the semiconductor industry.

According to SEMI, “the standard has been implemented by essentially all semiconductor tool vendors and is now required by almost all fabs world-wide”.

SEMI F47 requires tools to be immune to voltage sags of depths and duration above the red line shown below. In other words, a SEMI F47 compliant tool continues to operate if the voltage sag is above the red line. The figure below shows a collection of real-world voltage sags and the SEMI F47 limit line.


Voltage sags, according to SEMI F47, should not affect the operation of the tool

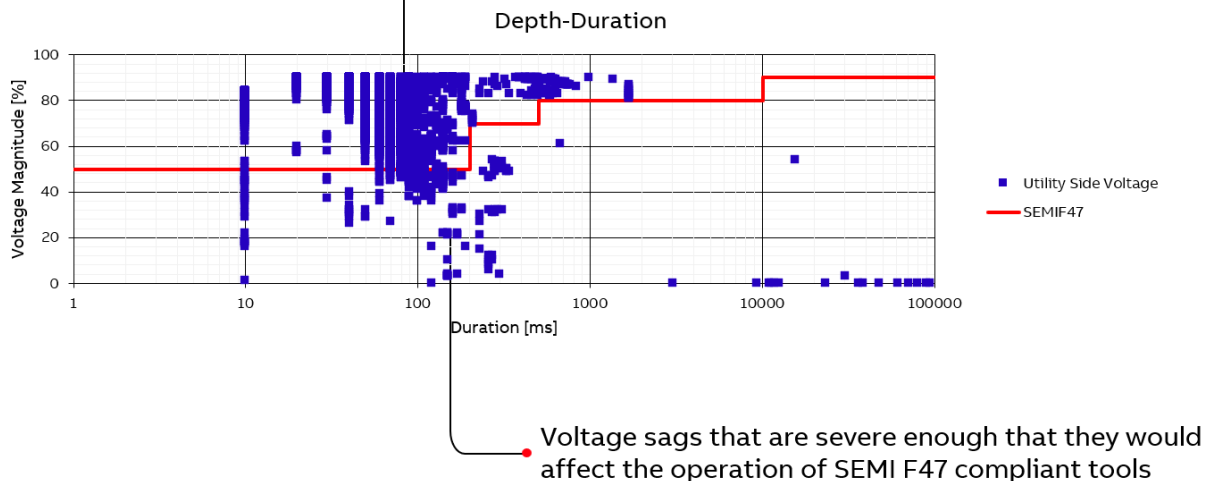


PCS100 AVC-40 is able to correct the voltage sags above the red line as well as voltage sags below the red line.

The below figures show corrected voltages for three-phase sags and other types of sags such as single-phase sags that were below the red limit line. The AVC-40 product corrects the majority the sags to the point that the protected tool is not impacted by the sag.

SEMI F47 compliant tool will not be impacted by these voltage sag events

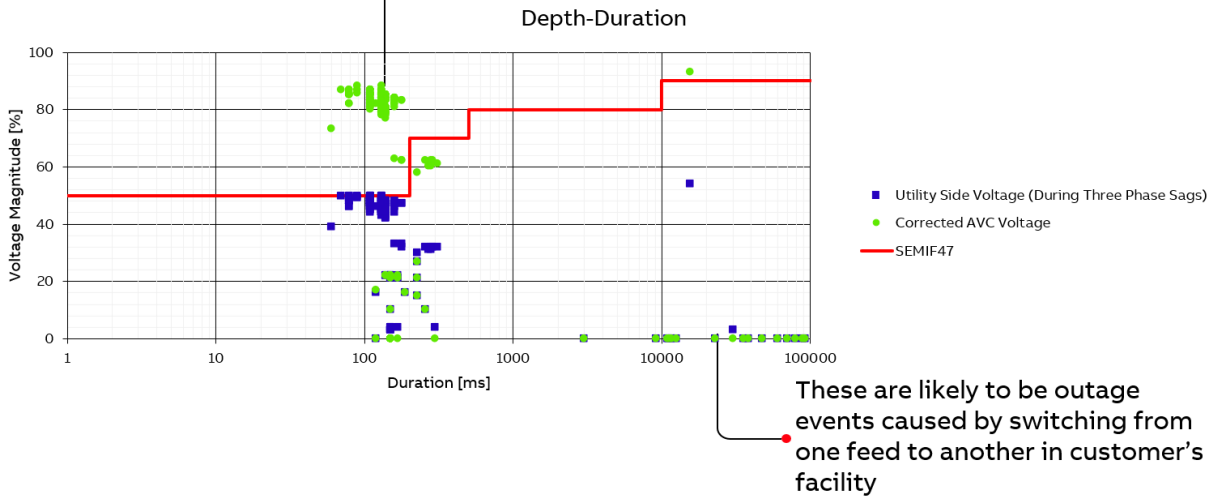

SEMI F47 compliant tool will not be impacted by these voltage sag events

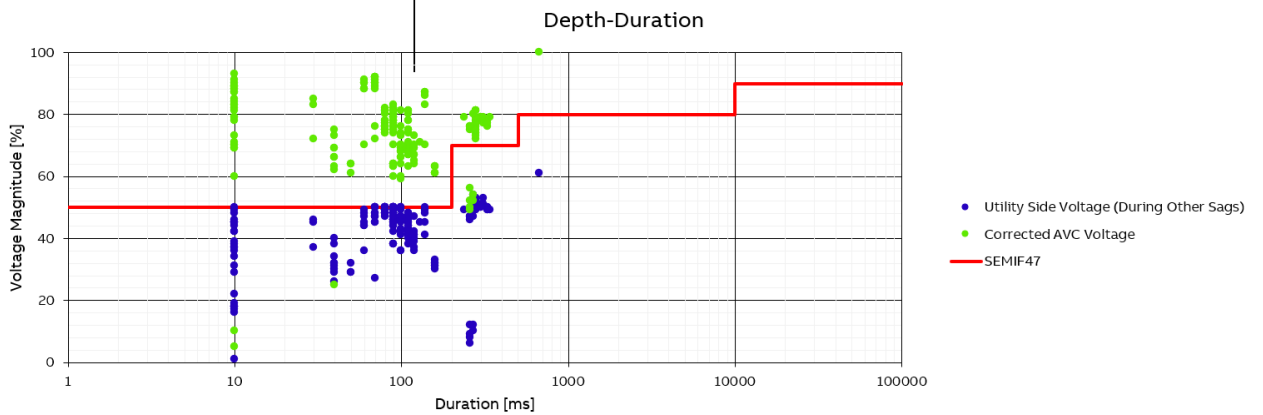

TECHNICAL SPECIFICATION

Utility - Input	
Power range	225 kVA – 300 kVA
Rated voltage ¹ (model specific)	208 V /220 V application range 208 - 220V
	400 V application range 380 – 415 V
	480 V application range 440 – 480 V
Maximum supply voltage	110%
Nominal supply frequency	50 or 60 Hz
Frequency tolerance	± 5 Hz
Power system	3-wire plus ground input (grounded wye source) + Neutral (4-Wire) ² if required by load
Overvoltage category	III
Fault capacity	Refer to the model tables shown in this document
Outage – control ride through	600 ms
Harmonics ³	IEC 61000-2-4 Class 2 (THDv < 8%)
Load - Output	
Voltage	To match nominal input voltage ⁴
Equivalent series impedance	< 4% (model specific)
Displacement power factor	0 lagging to 0.9 leading ⁵
Crest factor	3.0 ⁶
Overload capability from 100% supply voltage	150% for 30 s, once every 500 s
Performance	
Efficiency	> 98% (Under Nominal Conditions)
Sag correction response	Initial < 250 μs
	Complete < ½ cycle
Voltage regulation accuracy	±1% typical, ±2% max.
Sag correction accuracy	±4%
Continuous regulation range	±10%
Sag correction performance ⁷	
Three phase sags	60% to 100% for 30 s, 50% to 90% for 10 s
Single phase	40% to 100% for 30 s
Partial correction derating conditions ⁸	1.0 PF at 80% load
	0.8 PF at 100% load
Internal Bypass	
Capacity	100% of model rating (kVA)
	125% for 10 minutes
Maximum overload capacity (in bypass)	150% for 1 minute
	500% for 1 s
	2000% for 200 ms
Transfer time	To Bypass < 0.5 ms
	To Inverter < 250 ms
Equivalent series impedance	bypass < 2.5% typical

¹ Please refer PCS100 AVC-40 model range table for more information on rated voltage

² Neutral provided by supply transformer if required by the load. Neutral connection is not required to the PCS100 AVC-40. See SLD Drawing 2UCD070000E202.

³ For THDv > 8%, please refer to factory. For applications where THDv is above 10% lifetime of components may be significantly affected, please refer to factory.

⁴ Output voltage can be adjusted by ±10% with 0.1% steps

⁵ Consult the factory if there is a power factor correction unit downstream

⁶ Only applies at nominal load and for single phase loads

⁷ Refer to performance curves in this document for more details

⁸ Refer to document 2UCD070000E202 PCS100 AVC Detailed Performance Curves

Injection Transformer	
Transformer type	Dry
Insulation	IEC 60085 Thermal class 200
Frequency	50 Hz and 60 Hz
Vector group	Diii (delta + 3 independent windings)
Environmental	
Operating temperature range	0 °C to 50 °C
Temperature derating	Above 40 °C, derate at 1.25% load per °C to a maximum of 50 °C
Operating altitude	< 1000 m without derating
Capacity derating with altitude	1% every 100 m above 1000 m 2000 m maximum
Inverter cooling	Forced ventilation
Transformer cooling	Natural convection
Humidity	< 95%, non-condensing
Pollution degree rating	2
Noise	< 75dBA @ 2 m
Enclosure	
Enclosure rating	IP20 (IP21 with optional roof kit) [NEMA1 (NEMA 2 with optional roof kit)]
Material	Bright Zinc Galv Steel
Panel thickness	
Side and rear	1.6 mm
Door	1.6mm
Finish	Powder Coated Ripple Finish (excludes rear cover)
Color	RAL7035 Light Grey
Enclosure access	Lockable, hinged full-sized door that opens 120 degrees with key lock
Service	
MTTR	30 min typical by module exchange
Diagnostics	Non-volatile event & service log
Remote monitoring	E-mail
User Interface	
User interface	10.1" color touch panel, multilingual
Touch panel	Full parameter control, system event log, voltage event log
Control inputs	Start / Stop / Reset digital inputs
Control outputs	Run, warning and fault relays
Communication	Ethernet Modbus TCP E-mail
Power Quality Event Monitor	
Events recorded	Voltage Sag (RMS) Voltage Surge (RMS)
Measurement type	Half-cycle RMS according to IEC 61000-4-30
Event detection	Input Voltage
Sag threshold	90% of Utility voltage default setting (user adjustable)
Surge threshold	110% of Utility voltage default setting (user adjustable)
Accuracy	Voltage: ±2% Duration: 10 ms
Remote monitoring	E-mail notification
Standards and Certifications	
Quality	ISO 9001
Marking	UL, CE, C-Tick
Safety	IEC 62477-1
Electromagnetic compatibility	Emissions: CISPR 11 Class A Group 1 Immunity: IEC 61000-6-2
Performance	IEC 61000-4-34 SEMI F47

HOW TO SELECT A PCS100 AVC-40

To select the correct size of the PCS100 AVC-40 for the application the following information should be known.


- Utility voltage
- Power rating of the load (kVA and kW, or kVA and power factor)

The product tables in the following section can then be used to look up the required model for the given application. Each model has a specific type code.

Type Code

The PCS100 AVC-40 type code is given in the product tables. The type code is a unique code for the specific PCS100 AVC-40 model and specifies all the components that are used to construct the model. From the base code given in the product tables options can be added to the type code. These options are called plus (+) codes.

The following diagram outlines the structure of the type code:

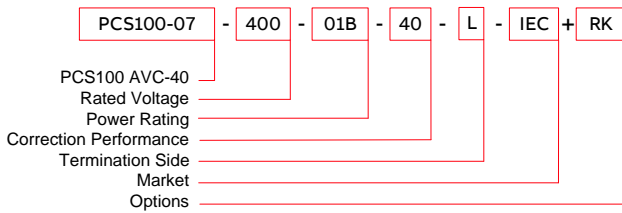

Type Code Parameters:

Rated Voltage

This is the rated voltage of the PCS100 AVC-40. Options are 480 V, 400 V, and 208 V. Other operating

voltages (e.g. 220V or 380V) are achieved by software settings and setting of an auxiliary transformer tapping.

Power Rating

Rated power of the system is based on the number of power module pairs. The power module pair

Correction Performance


Defines sag correction performance. Correction performance of the PCS100 AVC-1B UL is 40%.

Termination Side

The location of the power terminals (input and output) when viewed from the front of the Enclosure⁹

PCS100 AVC Sizing Tool

In addition, ABB provides a Windows PC application PCS100 AVC Sizing Tool that can be used to dimension the correct PCS100 AVC-40 model required for the application.

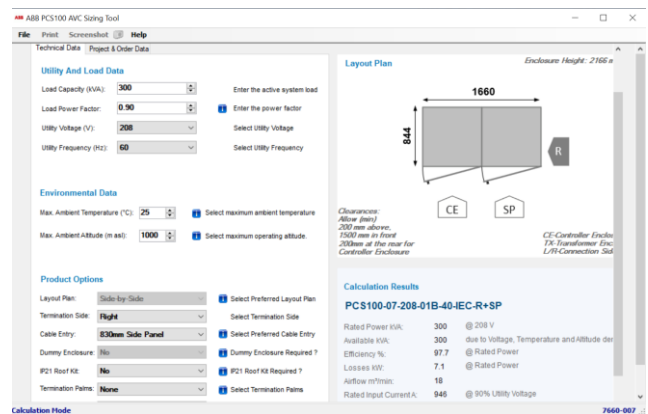

For further information and tool availability please contact your local ABB sales office. Operating on rated voltage provides 300 kVA of power¹⁰

⁹ Without additional termination related options termination side can be from left, right or bottom as the transformer terminals are facing front.

¹⁰ Operation at lower than the rated voltage results in less kVA per module pair. Consult the rating tables for more information.

PCS100 AVC-40 MODEL RANGE

IEC Model Range

Rated power [kVA]	Rated Input Current [A] ¹¹	Rated Output Current [A]	Fault Capacity [kA]	Losses [kW] ¹²	Efficiency [%] ¹³	Airflow [m ³ /min]	Frame Size	Type Code Place R for right termination side or L for left termination side instead of x	
208 V Models¹⁴									
Utility Voltages									
208, 220 V									
150	473	416	31.5	5.0	96.7	18	1B	PCS100-07-220-0B5-40-IEC-x	
225	710	625	31.5	6.5	97.2	18	1B	PCS100-07-220-0B75-40-IEC-x	
300	946	833	31.5	7.1	97.7	18	1B	PCS100-07-220-01B-40-IEC-x	
400 V Models¹⁵									
Utility Voltages									
400, 415 V 380 V									
150	142	253	217	15	4.7	96.9	18	1B	PCS100-07-400-0B5-40-IEC-x
225	213	377	325	15	6.1	97.3	18	1B	PCS100-07-400-0B75-40-IEC-x
300	285	498	433	15	6.6	97.8	18	1B	PCS100-07-400-01B-40-IEC-x
480 V Models¹⁶									
Utility Voltages									
480 V 440 V									
150	138	211	180	20	4.7	96.9	18	1B	PCS100-07-480-0B5-40-IEC-x
225	206	315	271	20	6.1	97.3	18	1B	PCS100-07-480-0B75-40-IEC-x
300	275	415	361	20	6.6	97.8	18	1B	PCS100-07-480-01B-40-IEC-x

*Please refer to document 2UCD074000E009 for the UL range.

¹¹ At 90% utility voltage

¹² Typical value

¹³ Typical value

¹⁴ UL certified 208 V, 50 Hz models, 220 V, 50/60 Hz models can be purchased via UL field Certification. Please contact the sales team. For 208 V, 60 Hz models please refer 2UCD074000E009 PCS100 AVC-40 UL Technical Catalogue

¹⁵ UL certified 400 V (380 V, 415 V) 50/60 Hz models can be purchased via UL field Certification. Please contact the sales team.



¹⁶ UL certified 480 V, 50 Hz models, 440 V, 50/60 Hz models can be purchased via UL field Certification. Please contact the sales team. For 480 V, 60 Hz models please refer 2UCD074000E009 PCS100 AVC-40 UL Technical Catalogue

LAYOUT PLANS AND DIMENSIONS

Layout Plans

The following plans relate to the PCS100 AVC-40 in a 1B frame size.

1B frame size¹⁷

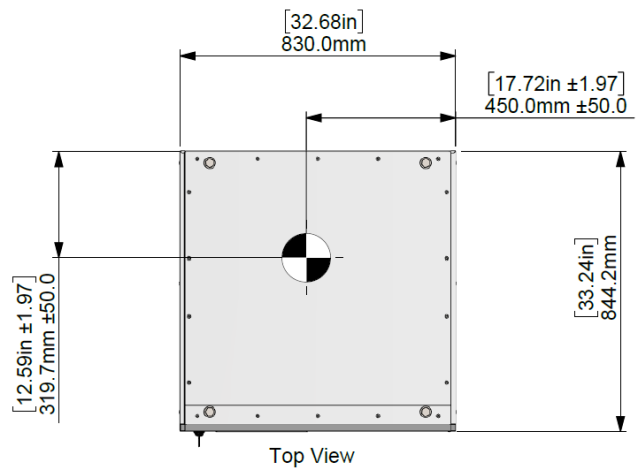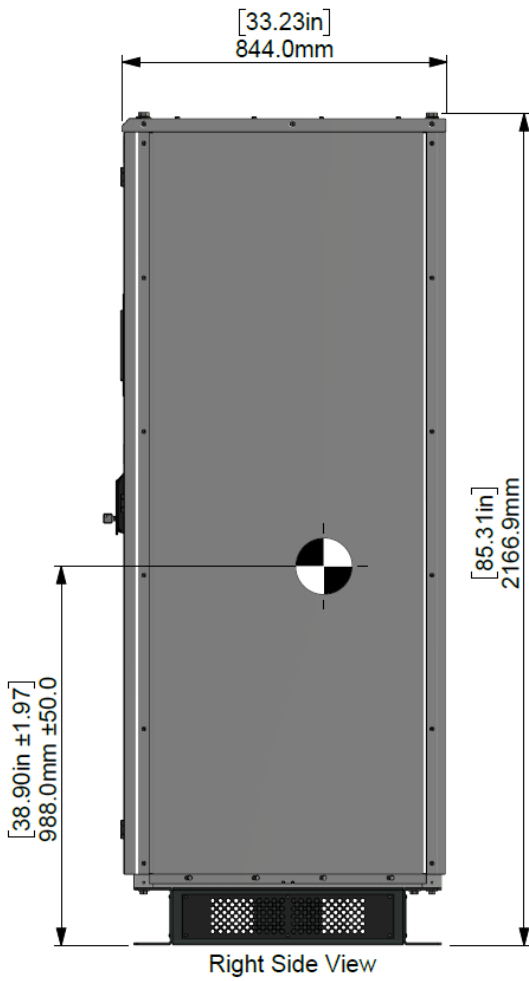

¹⁷ Termination side can be from left, right or bottom as the Injection Transformer terminals (customer's connection terminals) are facing front.


Clearance

The following clearances are required for all enclosures:

- Allow 200 mm (minimum above)
- Allow 1500 mm (recommended) clearance in front
- Allow 200 mm (minimum) clearance at the rear of Enclosure for air flow.

- No side clearance required

- Side clearance to the wall at the side where the cabinet outmost hinges of minimum 400 mm is recommended to allow the doors to open sufficiently. The doors must open 120° to allow normal cabinet access the PCS100 AVC-40 module replacement.

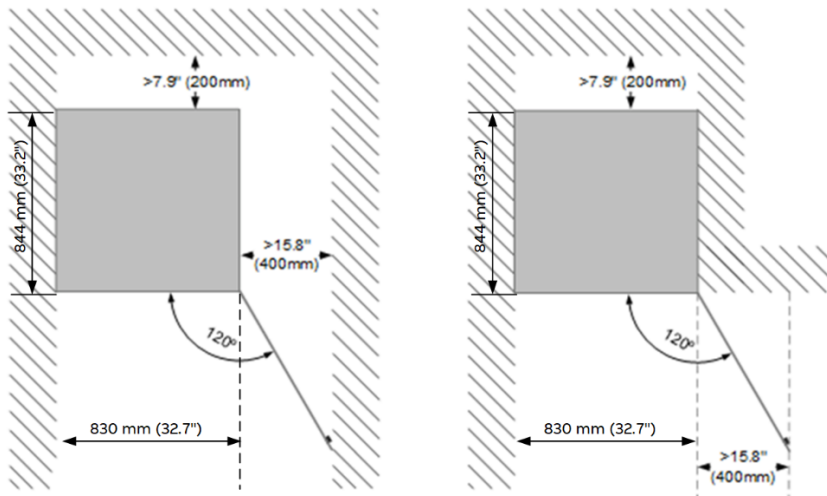

Weights

The following tables show the dimensions and weights of the Enclosure¹⁸.

Frame Size	Enclosure Dimensions	Enclosure Weight	
	(HxWxD)	208 V Models	400 and 480 V Models
1B	2167x830x844 mm	1175 kg	1030 kg

¹⁸ Allow ±10% tolerance for weights shown in the table

OPTIONS

The following options are available for the PCS100 AVC-40 enclosures.

Plus Code	Option Description
RK	Roof Kit
SC	Side Car
TE	Termination Enclosure
PS	Redundant Power Supply

Roof Kit (RK)

Roof Kits are available where small amounts of liquid may fall onto the top of the main enclosure. The roof kit option increases the units' protection degree to IP21. These are only for indoor use. There is a 200mm clearance from the enclosure top to the roof kit. The kit will cover the enclosure top. The roof kit is shipped separately and must be assembled on site. Roof kit only covers the main enclosure.



Side Car (SC)

The Side Car provides flexibility in cable management. The design of the Side Car support both top¹⁹ and bottom cable entry.



¹⁹ Use appropriate tools to drill holes for steel plate if needed.

Termination Enclosure (TE)

The 400 mm Termination Enclosure option allows easier power connections or to match enclosure sizes with other equipment.

The Termination Enclosure has the same depth as the AVC-40 Enclosure and is mounted on the side of the transformer terminals.

The enclosure comes complete with a plinth and door access to enable top or bottom cable (or bus bar) connection.

The Termination Enclosure option includes cable support and gland plate.



Redundant Power Supply Unit (PS)

This option provides a new Auxiliary Master Module that contains two PSUs to provide redundant DC feed to the system.

The PSU has an internal status signal to indicate the status of each PSU. This signal is monitored and will

provide a warning 364 Redundant Aux Power if either PSU fails. The redundant PSU is designed such that the two PSUs share the DC supply of the system. If one PSU fails, the other will take over and supply all the modules.


USER INTERFACE

Graphic Display Module

The primary user interface for configuration of the PCS100 AVC-40 is via the Graphic Display Module (GDM). The GDM is a 10.1” touchscreen user-friendly intuitive interface. The integrated navigation screen gives easy accessibility to any information on the PCS100 AVC-40, shows the system status and provides access to the operating parameters and

event history. The mimic diagram gives the users a clear view of the status of the system.

The supported languages are: English, French, Italian, Malaysian, Turkish, Russian, German, Vietnamese, Spanish, Simplified Chinese, Japanese, Traditional Chinese, Swedish, Indonesian, Portuguese, Arabic and Korean.

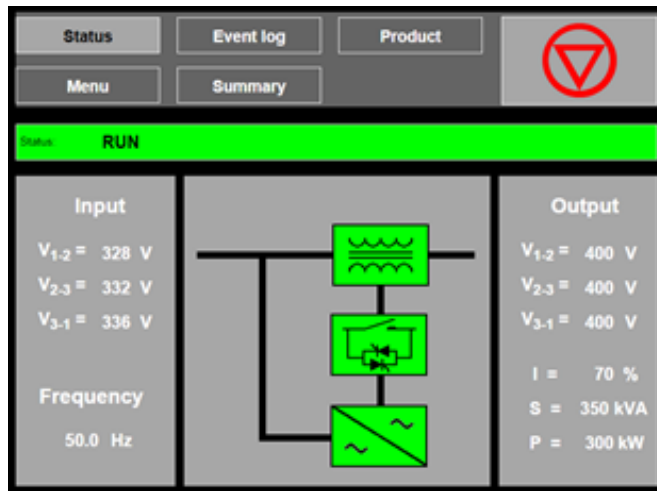

Features	GDM
Display resolution	1024 × 600 pixels
Display size	10.1”
Color graphic display	yes
Touch sensitive display	yes
Full descriptions of status and faults	yes
Local Start/Stop Reset Control	yes
Status Display	yes
Parameter adjustment	yes
Number of Event Log records stored	10,000
Event log can be downloaded to a PC	yes
Remote Web Pages	yes
Modbus TCP connection	yes
Multilanguage selection	yes
E-mail monitoring	yes

Remote Monitoring

The GDM provides remote access for monitoring purpose. The following monitoring connections are available.

Communication Type	Description	Connection
Remote Web Pages	HTML server - Ethernet connection	Standard RJ45
Monitoring system	Modbus TCP	Standard RJ45
Remote notifications	E-mail	Standard RJ45

Remote Web Pages

The Remote Web Pages are a set of web pages that are similar in format to the standard GDM and can be viewed with any standard web browser on a device connected to the same network. Through this interface the users can remotely access the status and operating parameters. Viewing and downloading of the event history and service logs is also available. The Remote Web Pages enable users to select different languages for each remote client.


Modbus TCP

A Modbus TCP connection is also provided via the

Ethernet port of the GDM user interface. Read Only access is available to operating parameters such as voltages, currents and power levels.

E-mail

The PCS100 AVC-40 is configurable for sending e-mail notifications in case of power quality events or systems internal events such as faults and warnings. Automatic sending of the service logs via e-mail to ABB Service can also be enabled.

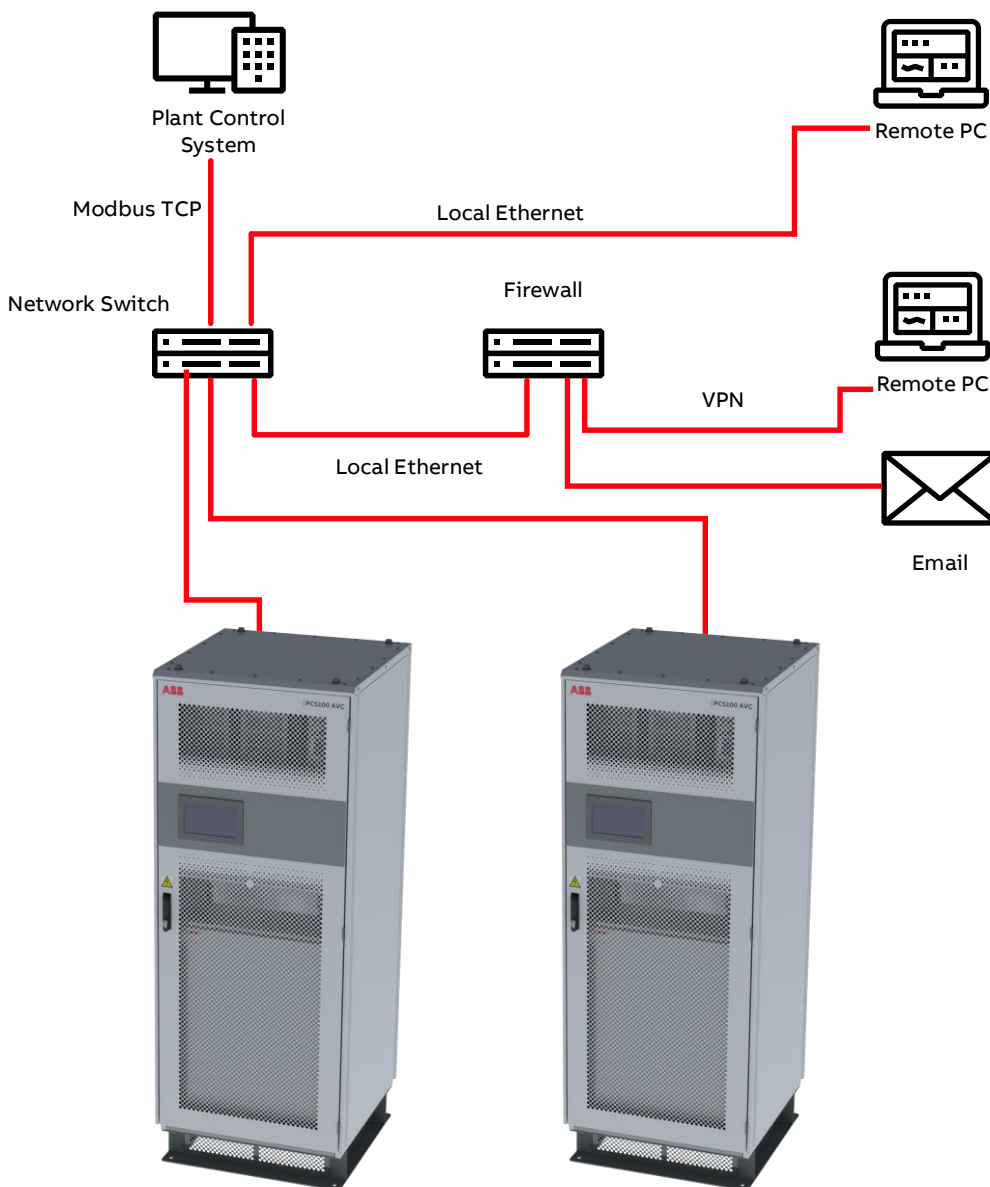


USER CONNECTIONS

Power Connections

The PCS100 AVC-40 utility supply (input) and load (output) connections are connected directly to the Injection Transformer terminals in the Enclosure.

The following table defines connection sides.

Transformer terminals	Connections
Top terminals	Utility Supply (Input)
Bottom terminals	Load (Output)

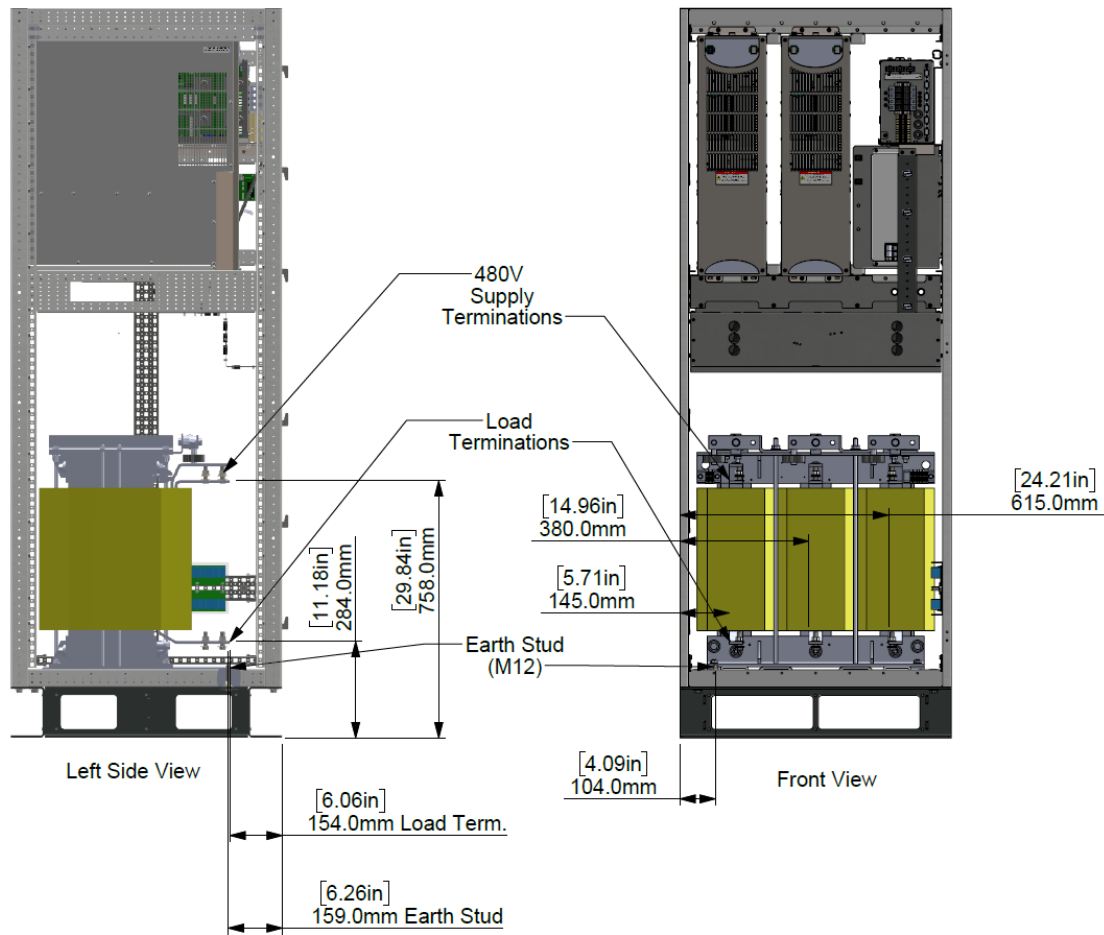


Control Connections

The PCS100 AVC-40 includes control connections for local control or monitoring of the system. Control

connection terminals are located on the Auxiliary Master Module in the Master Controller Enclosure.

Control Connection	Description
3 Relay Outputs	PCS100 AVC-40 status information 250 VAC/30 VDC, 1 A
1 Isolated Thermal Switch	Transformer over temperature information 24 VDC/24 VAC, 1 A Normally closed (NC) contact
2 Digital Inputs	PCS100 AVC-40 Remote control Start/Stop/Inhibit Dry contacts

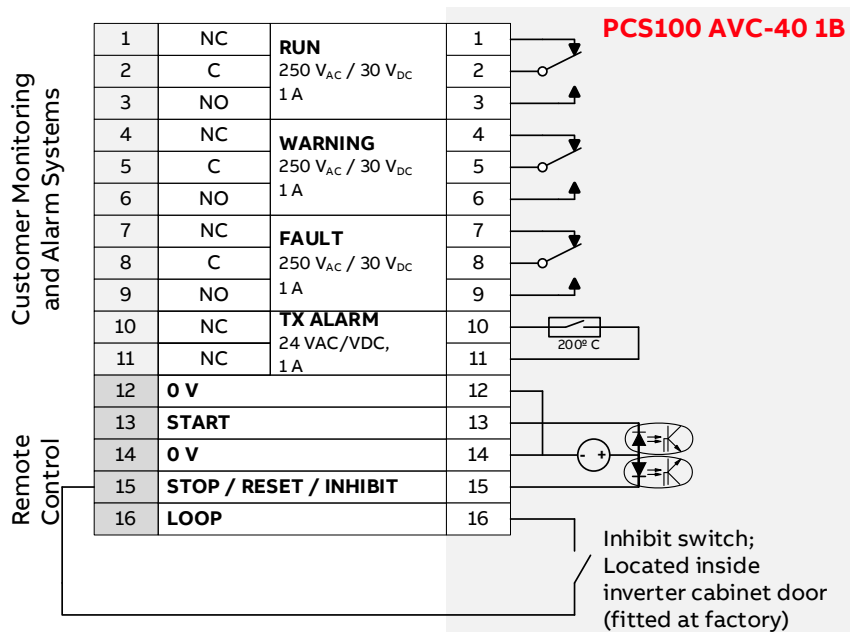

INSTALLATION REQUIREMENTS

Input Circuit Protection

The PCS100 AVC-40 relies upon upstream protection for current overload and short circuit protection. Upstream protection should be provided by a circuit breaker.

Overload protection must not be set greater than the PCS100 AVC-40 rated load current. Short circuit and arc fault calculations should include allowance for the additional PCS100 AVC-40 impedance (typically < 2.5%). Circuit breakers should be set to trip without any delay on short circuit or arc fault currents.

Coarse ground fault detection is recommended for high current systems where it may be difficult to assure ground or arc fault currents of sufficient magnitude to instantaneously trip the breaker.

The PCS100 AVC-40 unit is designed to withstand significant short circuit current. Typical short circuit withstand ratings are summarized in the model tables and also in the table below. The smaller systems in the table rely on fault current limiting protection from upstream circuit breakers or fuses provided by the customer.

For 400/480 V models 1B frame size current limiting molded case circuit breakers (MCCB) are required to provide very fast clearing of short circuit currents. ABB TMax XT series or equivalent are suitable.

Frame Size		1B
Rated Power	[kVA]	300
208 V models, I _{cc}	[kA]	31.5 ²⁰
400 V models, I _{cc}	[kA]	15 ²¹
480 V model, I _{cc}	[kA]	20 ²¹

Short time withstand current rating (I_{cw}) for PCS100 AVC-40 is 2000% for 200 ms, however any fault current exceeding this value and less than or equal to the I_{cc} (interrupt rating/conditional short-circuit current) value shall be equipped with instantaneous

tripping circuit breaker protection such as ABB Tmax XT series breakers.

If required, the ABB factory can provide assistance with sizing appropriate protection. The PCS100 AVC-40 can sustain the fault currents listed above without damage and can be returned immediately to service following the fault. Where higher fault currents occur, service may be required following a downstream fault.

Maintenance Bypass

ABB recommends that a maintenance bypass (not supplied with the PCS100 AVC-40) is fitted. The maintenance bypass allows maintenance to be performed on the PCS100 AVC-40 without disruption to the load.

ABB requires the input and output breakers of a maintenance bypass to be lockable for an ABB service personnel to carry out any work on the PCS100 AVC-40. Please note that ABB LV breakers do not provide this as standard but as an option.

Floor Requirements

All enclosures must be installed on a horizontal fireproof surface.

Do not exceed ± 0.2° change in slope between adjacent enclosures.

Do not exceed ± 0.2" in elevation between adjacent enclosures.

Location

The PCS100 AVC-40 is designed for location in a restricted access location only.

The PCS100 AVC-40 is designed for connection by fixed wiring.

The PCS100 AVC-40 system should be located in a clean electrical room with a controlled environment temperature and humidity according to the requirements under the Technical Specification section.

²⁰ Needs to be protected by upstream protection.

²¹ Needs to be protected MCCB (ABB Tmax XT series or equivalent)

Power System

The PCS100 AVC-40 is designed for TN-S power system where the upstream transformer provides neutral the load may require. Consult the factory for use in other earthing system.

Electromagnetic Compatibility (EMC)

The PCS100 AVC-40 is designed for commercial and industrial applications. It is not suitable for connection to a low-voltage utility that is supplying residences unless additional measures are taken.

Harmonics

The PCS100 AVC-40 is designed to tolerate disturbances such as voltage and current harmonics in the load or supply.

Excessive distortion can lead to the stressing of components leading to reduction in the lifetime of the rectifier and inverter modules.

ABB recommends the harmonic contents on the input and the output of the system to meet IEC 61000-2-4 Class 2, THD_v up to 8%. Contact the factory for THD_v > 8% as the lifetime of components may be affected.

Downstream Capacitor Banks

A care must be taken when installing the PCS100 AVC-40 with a capacitor bank downstream of the system. ABB recommends the capacitor bank to be installed upstream of the PCS100 AVC-40. Contact ABB for more information

SERVICE AND TECHNICAL SUPPORT

ABB Power Conditioning provide global service and support of installation and commissioning of PCS100 products

Comprehensive global services portfolio

ABB services span the entire product ownership life cycle:

- Pre-purchase engineering
- Installation and commissioning
- Technical support
- Training
- Preventive and corrective maintenance and maintenance spare parts kits
- Retrofit and refurbishment
- Globally available, supported by regional service hubs and operating in more than 100 countries
- Spare part availability and stocking
- On-site repairs
- 24 x 365 local support line

Custom tailored service contracts

- 24 x 365 local support line
- ABB services can be packaged into a custom service contract
- Tailored to the specific needs of each customer
- Contracts can be made at any stage of ABB product ownership

Service contracts provide customers with improved cost controls, increased operational efficiency, lower capital expenditures, and extend ABB product life time.

Life cycle management

ABB's life cycle management model maximizes the value of the equipment and maintenance investment

by maintaining high availability, eliminating unplanned repair costs and extending the lifetime of the system. Life cycle management includes:

- Spare parts and expertise throughout the life cycle
- Efficient product support and maintenance for improved reliability
- Functionality upgrades to the initial product

Training

- Product training includes installation, commissioning, and maintenance
- Training either at ABB Universities or at a customer site
- Training can be included in an ABB services contract

Engineering and technical support

ABB's engineering team provides the necessary electrical, protective and monitoring equipment, delivering a high level of energy continuity and superior power quality in a safe and cost-effective system. The PCS100 is available in several capacities, depending on the scope of application.

- Pre-purchase engineering to help select and integrate ABB PCS100 products
- Customer assistance in sizing and modeling of systems
- Other life cycle engineering and technical support is available by phone, email, or on-site visits, or as agreed in an ABB services contract
- Redundant internal bypass design increases reliability and availability and is part of a proven family of global ABB products
- Scalable building block design

ADDITIONAL DOCUMENTS

Document Number	Document Name
2UCD074000E013	PCS100 AVC-40 User Manual
2UCD074000E002	PCS100 AVC-40 Installation Checklist
2UCD074000E004	PCS100 AVC-40 Commissioning Checklist
2UCD070000E020	PCS100 AVC Detailed Performance Curves
2UCD070000E025	AVC in TT Power Systems AN
2UCD200000E007	PCS100 Environment Specification



<https://library.abb.com>

—
ABB Ltd.
111 Main North Road
4110, Napier
New Zealand

abb.com/ups

2UCD074000E010_C



© Copyright 2020 ABB. All rights reserved.
Specifications subject to change without notice.